

Datasheet

LED Pendulum Slim RGBW

PWM Anthracite

Part No: 100275



About the product

The Loxone LED Pendulum Slim RGBW is a pendant light that combines **colored light** and **warm white light**. A PWM dimmer such as the Loxone **RGBW 24V dimmer** is required for **control** and **dimming**.

Features:

- Timeless, elegant design
- Gentle dimming behavior
- Unique lighting architecture
- Flexible application options

Electrical Specifications

Supply voltage	21.6 ... 25.2 VDC
Power consumption	Red: 1.5W Green: 4.8W Blue: 1W Warm white: 12W max. 12W
Dimming range	0 ... 100%
PWM frequency	123 ... 400Hz
Energy efficiency (EU) 2017/1369	F

Ambient Conditions


Temperature	-40 ... 55°C / -40 ... 131°F
Humidity	max. 95 % r. h. (non-condensing)

Connections

Wire cross-section	Connection Cable: 0.75mm ² / AWG18 Connection Terminals: 0.14 ... 4mm ² / AWG24 ... 12
Stripping length	Connection Cable: 5mm / 0.2" Connection Terminals: 11mm / 0.43"
Temperature resistance	Connection Cable: max. 70°C / 158°F Connection Terminals: max. 85°C / 185°F

Connection Diagram

Connection Diagram

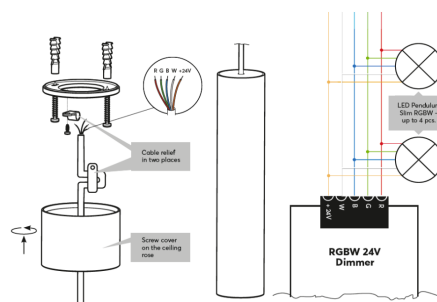


Light Properties

Colour temperature	typ. 3000k (warm white)
Luminous flux	typ. 975lm (warm white)
Colour rendering index (CRI)	min. 80, typ. 83
Beam angle	RGB: 120° WW: 38°
Unified glare rating (UGR)	<19

Product Characteristics

Colours	Anthracite: RAL 7016 - Part No. 100275 White: RAL 9003 - Part No. 100274
Material	Alu and Plastic
Finish	Matte
Max. drop from ceiling to lower edge of pendant	2m

Weight & Dimensions

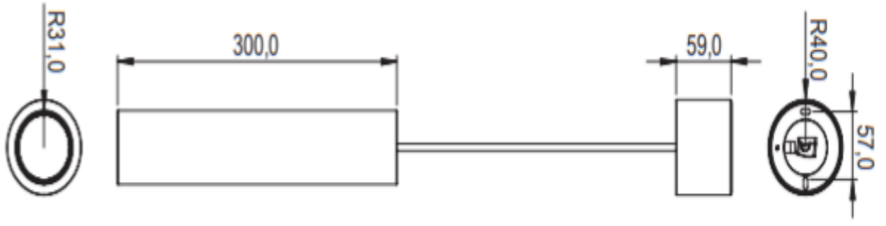Net weight	835g
Total weight	1150g
Product dimensions	Luminaire: 300x60mm / 11.81x2.36 (LxD) Baldachin: 60x80mm / 2.36x3.15 (LxD)
Product dimensions drawing	
Pack size	394x253x83mm / 15.51x9.96x3.27" (LxWxH)

Certifications & Standards

Safety class	IP20
Certifications	

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

LED Pendulum Slim RGBW

PWM Anthrazit

Part No: 100275



Über das Produkt

Die Loxone LED Pendulum Slim RGBW ist eine Pendelleuchte, die **Farblicht** und **warmweißes Licht** kombiniert. Zur **Ansteuerung** und für das **Dimmen** wird ein PWM Dimmer wie die Loxone **RGBW 24V Dimmer** benötigt.

Features:

- Zeitloses, edles Design
- Sanftes Dimmverhalten
- Einzigartige Lichtarchitektur
- Flexible Einsatzmöglichkeiten

Elektrische Spezifikationen

Versorgungsspannung	21,6 ... 25,2 VDC
Leistungsaufnahme	Rot: 1,5W Grün: 4,8W Blau: 1W Warmweiß: 12W max. 12W
Dimmbereich	0 ... 100%
PWM Frequenz	123 ... 400Hz
Energieeffizienz (EU) 2017/1369	F

Umgebungsbedingungen


Temperatur	-40 ... 55°C / -40 ... 131°F
Luftfeuchtigkeit	max. 95 % r. F. (nicht kondensierend)

Anschlüsse

Leiterquerschnitt	Anschlussleitung: 0,75mm ² / AWG18 Anschlussklemmen: 0.14 ... 4mm ² / AWG24 ... 12
Abisolierlänge	Anschlusskabel: 5mm / 0.2" Anschlussklemme: 11mm / 0.43"
Temperaturbeständigkeit	Anschlusskabel: max. 70°C / 158°F Anschlussklemme: max. 85°C / 185°F

Anschlussplan

Anschlussplan

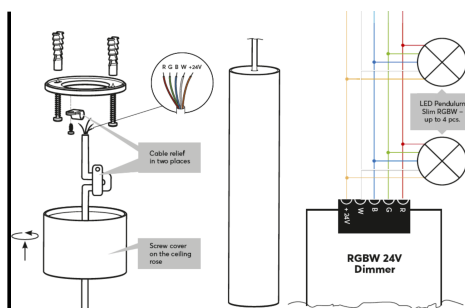


Lichteigenschaften

Farbtemperatur	typ. 3000k (warmweiß)
Lichtstrom	typ. 975lm (warmweiß)
Farbwiedergabeindex (CRI)	min. 80, typ. 83
Strahlwinkel	RGB: 120° WW: 38°
Einheitliche Blendungsbewertung (UGR)	<19

Produkteigenschaften

Farbe	Anthrazit: RAL 7016 - Art. Nr. 100275 Weiß: RAL 9003 - Art. Nr. 100274
Material	Alu und Kunststoff
Glanzgrad	Matt
Max. Abstand von der Decke bis zur Unterkante des Gehäuses	2m

Gewicht & Abmessungen

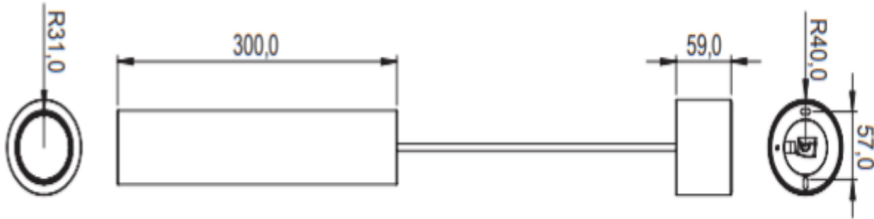Nettogewicht	835g
Bruttogewicht	1150g
Produktmaße	Leuchtkörper: 300x60mm / 11,81x2,36 (LxD) Baldachin: 60x80mm / 2,36x3,15 (LxD)
Produktmaßzeichnung	 The technical drawing shows a side view of the light fixture. It consists of a main rectangular body with a length of 300.0 mm. On the left side, there is a circular component with a radius of R31.0. On the right side, there is a smaller rectangular component with a width of 59.0 mm, which is connected to a circular component with a radius of R40.0. The height of this circular component is 57.0 mm.
Packmaß	394x253x83mm / 15.51x9.96x3.27" (LxWxH)

Zertifizierungen & Standards

Schutzklasse	IP20
Zertifizierungen	

Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom