


Datasheet

NFC Code Touch Tree

Signal White

Part No: 100481



About the product

The LOXONE NFC Code Touch Tree is an access solution with **NFC reader** and **illuminated number pad** on a **glass front**.

Features:

- In combination with the LOXONE Intercom, it creates the perfect access control center
- Powerful user management, even across locations
- Also perfect for working time management, lockers, billing, logging and much more

Electrical Specifications

Supply voltage	9 ... 28 V DC
Power consumption	typ. 0.05W, max. 0.8W (while reading NFC)
Power loss	max. 0.8W
Interface	LOXONE Tree: connection with Miniserver / Tree Extension
Temperature	-20 ... 70°C / -4 ... 158°F
Touch points	5 touch points, capacitive touch detection
NFC	Frequency: 13.56MHz
Mounting location with direct sunlight	white: allowed anthracite: not allowed
Recommended mounting height	135cm / 53.15"

Ambient Conditions

Humidity	max. 95% r.H. (non condensing)
----------	--------------------------------

Operating Elements

Click feedback	Yes
----------------	-----

Functional Specifications

specification_name.Unknown	NFC, Key code
----------------------------	---------------

Compatible NFC/RFID media

Unencrypted	ISO/IEC 14443, fixed UID required
Encrypted	Media with MIFARE® DESFire® Chip

Connection Terminals

Wire cross-section	0.25 ... 0.8 mm² / AWG 23 ... 18
Stripping length	5 mm / 0.2"
Temperature resistance	-40 ... 105 °C / -40 ... 221 °F

Connection Diagram


Connection Diagram

The diagram illustrates the assembly of the Loxone Tree keypad. On the left, an exploded view shows the keypad faceplate with a numeric keypad (0-9), a status LED, an NFC sensor, and a universal button. These components are shown relative to a mounting frame. On the right, a perspective view shows the keypad installed in a wall, with internal wiring connecting the power supply (DO WH) and the Loxone Tree (ON WH) terminals.

Product Characteristics

Colours	Anthracite: RAL9005 - Part No. 100480 White: RAL9003 - Part No. 100481
Finish	Matte

Weight & Dimensions

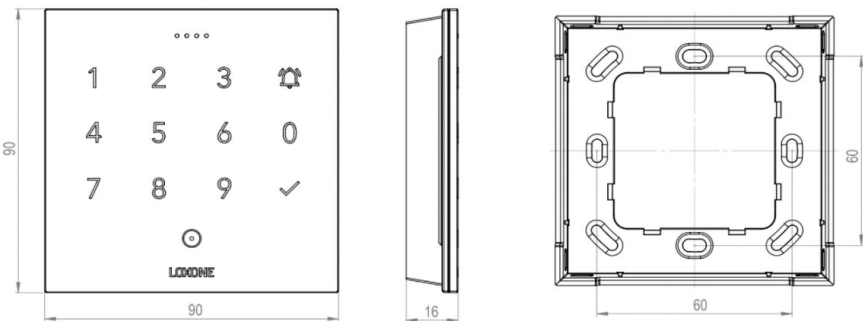Net weight	126 g
Total weight	160 g
Product dimensions	90 x 90 x 16 mm / 3.55 x 3.55 x 0.63" (L x W x H)
Product dimensions drawing	
Pack size	104 x 107 x 39 mm / 4.09 x 4.21 x 1.54" (L x W x H)

Certifications & Standards

Safety class	IP44
Certifications	UL 62368-1:2014 Ed.2 CSA C22.2#62368-1:2014 Ed.2
Certifications	  

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by

Loxone Electronics GmbH
 Smart Home 1
 4154 Kollerschlag
 Austria
 Tel: +43 7287 7070-0
 loxone.com


Loxone UK Ltd.
 The Forum
 Station Road
 Theale, RG7 4RA
 United Kingdom

Datenblatt

NFC Code Touch Tree

Signalweiß

Part No: 100481



Über das Produkt

Der LOXONE NFC Code Touch Tree ist eine Zutrittslösung mit **NFC-Leser** und **beleuchtetem Zahlenfeld** auf einer **Glasfront**.

Features:

- In Kombination mit der LOXONE Intercom entsteht die perfekte Zutrittszentrale
- Leistungsstarkes Benutzer:innenmanagement – auch standortübergreifend
- Eignet sich auch perfekt für Arbeitszeitmanagement, Schließfächer, Abrechnungen, Protokollierung und vieles mehr

Elektrische Spezifikationen

Versorgungsspannung	9 ... 28 V DC
Leistungsaufnahme	typ. 0,05W, max. 0,8W (während NFC-Auslesung)
Verlustleistung	max. 0.8W
Schnittstelle	LOXONE Tree: Verbindung mit Miniserver / Tree Extension
Temperatur	-20 ... 70°C / -4 ... 158°F
Tastpunkte	5 Tastpunkte, kapazitive Berührungserkennung
NFC	Frequenz: 13,56MHz
Montageort mit direkter Sonneneinstrahlung	weiß: erlaubt anthrazit: nicht erlaubt
Empfohlene Montagehöhe	135cm / 53,15"

Umgebungsbedingungen

Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
------------------	-------------------------------------

Bedienelemente

Klick Feedback	Ja
----------------	----

Funktionale Spezifikationen

specification_name.Unknown	NFC, Zutrittscode
----------------------------	-------------------

Kompatible NFC/RFID Medien

Unverschlüsselt	ISO/IEC 14443, feste UID benötigt
-----------------	-----------------------------------

Verschlüsselt	Medien mit MIFARE® DESFire® Chip
---------------	----------------------------------

Anschlussklemmen


Leiterquerschnitt	0,25 ... 0,8 mm ² / AWG 23 ... 18
-------------------	--

Abisolierlänge	5 mm / 0,2"
----------------	-------------

Temperaturbeständigkeit	-40 ... 105 °C / -40 ... 221 °F
-------------------------	---------------------------------

Anschlussplan

Anschlussplan

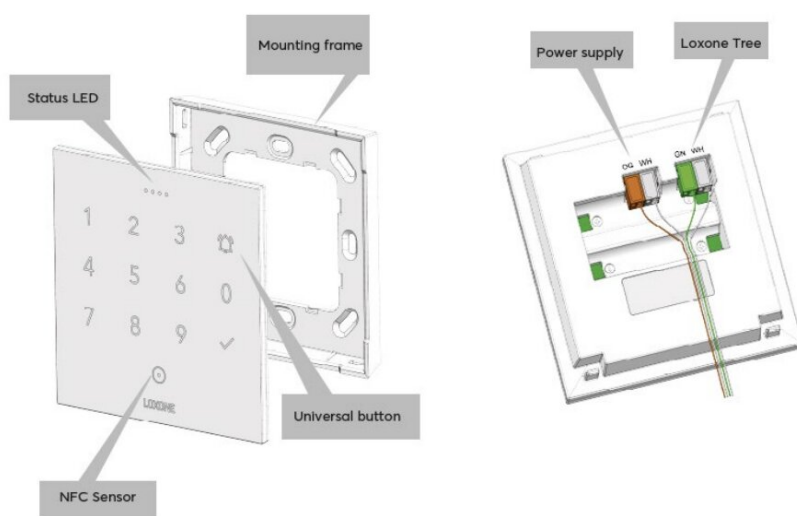


Produkteigenschaften

Farbe	Anthrazit: RAL9005 - Art. Nr. 100480 Weiß: RAL9003 - Art. Nr. 100481
-------	---

Glanzgrad	Matt
-----------	------

Gewicht & Abmessungen

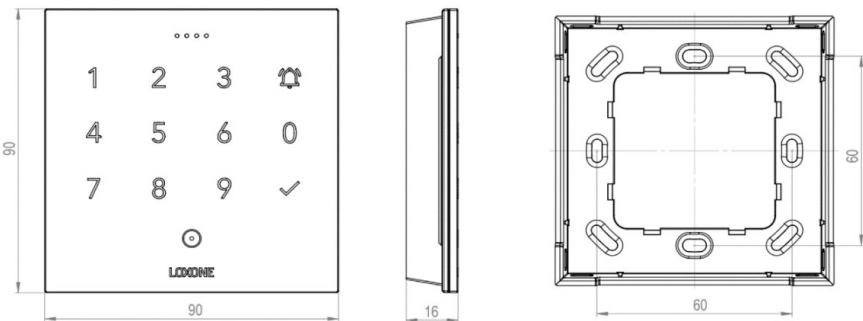Nettogewicht	126 g
Bruttogewicht	160 g
Produktmaße	90 x 90 x 16 mm / 3,55 x 3,55 x 0,63" (L x B x H)
Produktmaßzeichnung	
Packmaß	104 x 107 x 39 mm / 4,09 x 4,21 x 1,54" (L x B x H)

Zertifizierungen & Standards

Schutzklasse	IP44
Zertifizierungen	UL 62368-1:2014 Ed.2 CSA C22.2#62368-1:2014 Ed.2
Zertifizierungen	  

Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von

Loxone Electronics GmbH
 Smart Home 1
 4154 Kollerschlag
 Austria
 Tel: +43 7287 7070-0
 loxone.com

Loxone UK Ltd.
 The Forum
 Station Road
 Theale, RG7 4RA
 United Kingdom