

Datasheet

NFC Code Touch for Nano

Anthracite

Part No: 100307



About the product

The Loxone NFC Code Touch for Nano is an access solution with **NFC reader** and **illuminated number pad** on a **glass front** for **attachment to a Nano IO Air**.

Electrical Specifications

Power Supply	via Nano IO Air
Power consumption	typ. 0.02W, max. 0.6W (while reading NFC)
Power loss	max. 0.6W
Temperature	-20 ... 70°C / -4 ... 158°F
Click feedback	Yes
Access possibilities	NFC, Key code
Mounting location with direct sunlight	white: allowed anthracite: not allowed

Ambient Conditions

Humidity	max. 95% r.H. (non condensing)
----------	--------------------------------

Functional Specifications


Touch points (5)	capacitive touch detection
------------------	----------------------------

Compatible NFC/RFID media

Unencrypted	ISO/IEC 14443, fixed UID required
Encrypted	Media with MIFARE® DESFire® Chip

Connection Diagram

Connection Diagram

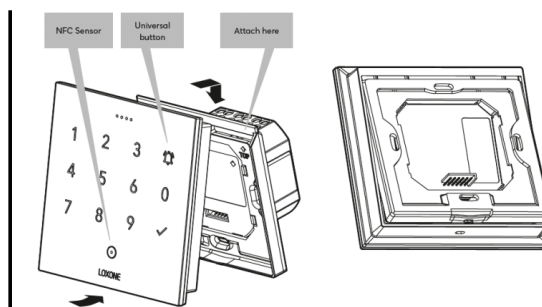

Product Characteristics

Colours

Anthracite: RAL7016 - Part No. 100307

White: RAL9003 - Part No. 100301

Finish

Matte

Weight & Dimensions

Net weight

122 g


Total weight

154 g

Product dimensions

90x90x15.8mm / 3.5x3.5x0.6" (LxWxH)

Product dimensions drawing

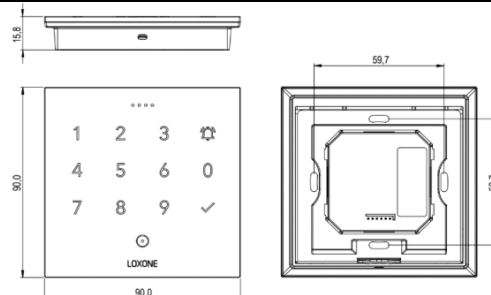

Pack size

104 x 107 x 39 mm / 4.09 x 4.21 x 1.54" (L x W x H)

Certifications & Standards

Safety class

IP20

Certifications



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by



Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

NFC Code Touch for Nano

Anthrazit

Part No: 100307



Über das Produkt

Der Loxone NFC Code Touch for Nano ist eine Zutrittslösung mit **NFC-Leser** und **beleuchtetem Zahlenfeld** auf einer **Glasfront** zum **Aufstecken auf eine Nano IO Air**.

Elektrische Spezifikationen

Spannungsversorgung	via Nano IO Air
Leistungsaufnahme	typ. 0,02W, max. 0,6W (während NFC-Auslesung)
Verlustleistung	max. 0.6W
Temperatur	-20 ... 70°C / -4 ... 158°F
Klick Feedback	Ja
Zugangsmöglichkeiten	NFC, Zutrittscode
Montageort mit direkter Sonneneinstrahlung	weiß: erlaubt anthrazit: nicht erlaubt

Umgebungsbedingungen

Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
------------------	-------------------------------------

Funktionale Spezifikationen


Tastpunkte (5)	kapazitive Berührungserkennung
----------------	--------------------------------

Kompatible NFC/RFID Medien

Unverschlüsselt	ISO/IEC 14443, feste UID benötigt
Verschlüsselt	Medien mit MIFARE® DESFire® Chip

Anschlussplan

Anschlussplan

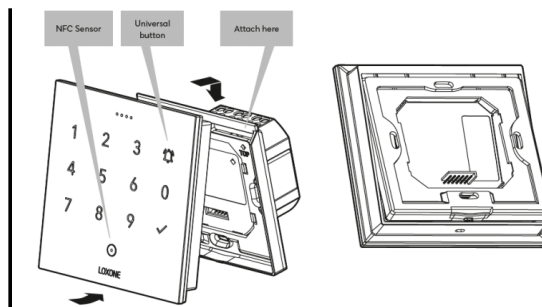

Produkteigenschaften

Farbe

Anthrazit: RAL7016 - Art. Nr. 100307

Weiß: RAL9003 - Art. Nr. 100301

Glanzgrad

Matt

Gewicht & Abmessungen

Nettogewicht

122 g


Bruttogewicht

154 g

Produktmaße

90x90x15.8mm / 3.5x3.5x0.6" (LxBxH)

Produktmaßzeichnung

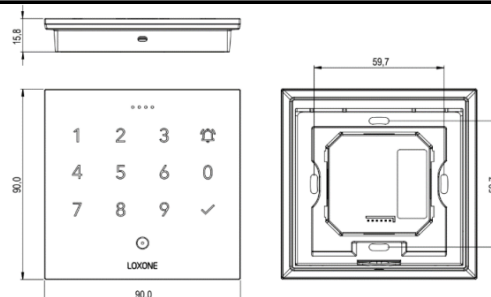

Packmaß

104 x 107 x 39 mm / 4.09 x 4.21 x 1.54" (L x W x H)

Zertifizierungen & Standards

Schutzklasse

IP20

Zertifizierungen



Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von



Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom