


Datasheet

Modbus Air

Part No: 100565



About the product

The Modbus Air enables the **wireless integration** of devices with **Modbus RTU interface**.

Features:

- Easy integration of a Modbus device with up to 253 sensors and actuators
- Individually adjustable baud rate and parity
- Support of data types with 16 and 32 bits

Technical Data

Power Supply	10 ... 30VDC
Power consumption	typ. 0.3W, max. 0.6W
Ambient temperature	-20 ... 65°C / -4 ... 149°F
Humidity	max. 95% r.H. (non condensing)

Interfaces


Loxone Air	868MHz (SRD Band Europe), 4 channels, max. 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels, max. 13.2mW internal antenna
Modbus RTU	1 Modbus device, 253 sensors and actuators adjustable baud rate & parity data types: 16 & 32 bit

Connecting Cable

Wire cross-section	0.14mm ² / AWG26
Temperature resistance	80°C / 176°F
Length	250mm / 9.84"
Part. No.	000589

Connection Diagram

Connection Diagram

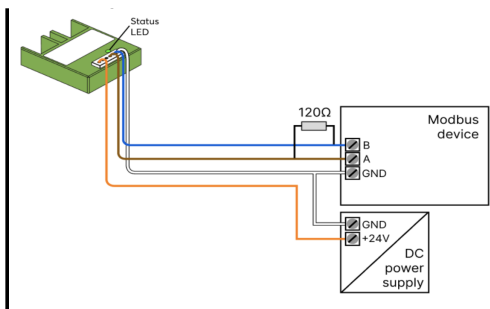

Product Characteristics

Colours	Green: RAL 6018
Finish	Matte

Weight & Dimensions

Net weight	54 g
Total weight	74 g
Product dimensions	38.3x34.3x10.5mm / 1.50x1.35x0.41" (LxWxH)
Product dimensions drawing	
Pack size	79x79x41mm / 3.11x3.11x1.61" (LxWxH)

Certifications & Standards

Safety class	IP20
Certifications	 

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by




Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

Modbus Air

Part No: 100565



Über das Produkt

Das Modbus Air ermöglicht die **drahtlose Einbindung** von Geräten mit **Modbus RTU Schnittstelle**.

Features:

- Einfache Einbindung eines Modbusgerätes mit bis zu 253 Sensoren und Aktoren
- Individuell einstellbare Baudrate und Parität
- Unterstützung von Datentypen mit 16 und 32 Bits

Technische Daten

Spannungsversorgung	10 ... 30VDC
Leistungsaufnahme	typ. 0.3W, max. 0.6W
Umgebungstemperatur	-20 ... 65°C / -4 ... 149°F
Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)

Schnittstellen


Loxone Air	868MHz (SRD Band Europa), 4 Kanäle, max. 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle, max. 13.2mW interne Antenne
Modbus RTU	1 Modbus Gerät, 253 Sensoren und Aktoren einstellbare Baudrate & Parität Datentypen: 16 & 32 bits

Verbindungskabel

Leiterquerschnitt	0.14mm ² / AWG26
Temperaturbeständigkeit	80°C / 176°F
Länge	250mm / 9,84"
Art. Nr.	000589

Anschlussplan

Anschlussplan

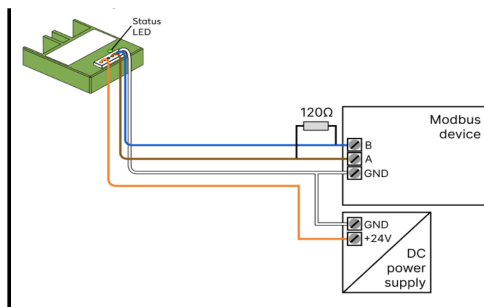

Produkteigenschaften

Farbe Grün: RAL 6018

Glanzgrad Matt


Gewicht & Abmessungen

Nettogewicht 54 g

Bruttogewicht 74 g

Produktmaße 38.3x34.3x10.5mm / 1.50x1.35x0.41" (LxWxH)

Produktmaßzeichnung

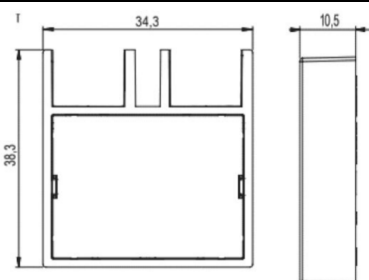

Packmaß 79x79x41mm / 3,11x3,11x1,61" (LxBxH)

Zertifizierungen & Standards

Schutzklasse IP20

Zertifizierungen



Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von



Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom