


Datasheet

Door & Window Contact Air Anthracite

Part No: 100667



About the product

The Loxone Door & Window Contact Air is a **compact wireless sensor** with an integrated reed contact. In combination with a magnet, it reliably detects open or closed doors and windows – **ideal for security** and **automation functions**.

Features:

- Long battery life up to 10 years
- Sleek design
- Perfect for retrofitting
- Reliable detection of window and door states
- Seamless integration with alarm, heating, and more

Electrical Specifications

Supply voltage	2x 1.5 V AA batteries
Battery lifetime	up to 10 years

Sensor Specifications

Type	Reed contact
------	--------------

Interfaces


Loxone Air	868 MHz (SRD Band Europe), 4 channels, max. 15.1 mW e.r.p. 915 MHz (ISM Band Region 2), 10 channels, max. 13.2 mW internal antenna
------------	--

Ambient Conditions

Temperature	0 ... 55 °C / 32 ... 131 °F
Humidity	max. 95 % r. h. (non-condensing)

Connection Diagram

Connection Diagram

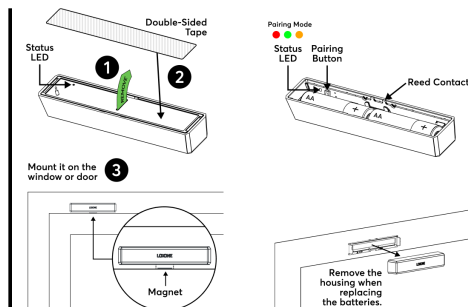

Product Characteristics

Colours

White: Part No. 100666
Anthracite: Part No. 100667

Finish

Matte

Weight & Dimensions

Net weight

70 g


Total weight

88 g

Product dimensions

116 x 22 x 17.5 mm / 4.57 x 0.87 x 0.69" (L x W x H)

Product dimensions drawing

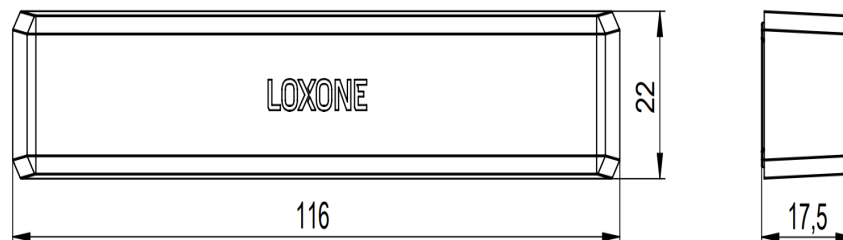

Pack size

140 x 56 x 21 mm / 5.51 x 2.21 x 0.83" (L x W x H)

Certifications & Standards

Safety class

IP20

Certifications



Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by




Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

Tür- & Fensterkontakt Air Anthrazit

Part No: 100667



Über das Produkt

Der Loxone Tür- & Fensterkontakt Air ist ein **kompakter Funksensor** mit integriertem Reed Kontakt. In Kombination mit einem Magneten erkennt er zuverlässig geöffnete oder geschlossene Türen und Fenster – **ideal für Sicherheits- und Automatisierungsfunktionen.**

Features:

- Lange Batterielaufzeit bis zu 10 Jahre
- Schlichtes Design
- Perfekt für Nachrüstungen
- Zuverlässige Erkennung des Öffnungszustands von Fenstern und Türen
- Nahtlose Einbindung in Alarm-, Heizungs- und andere Systeme

Elektrische Spezifikationen

Versorgungsspannung	2x 1,5 V AA Batterien
Batterie Lebensdauer	bis zu 10 Jahren

Sensor-Spezifikationen

Typ	Reed-Kontakt
-----	--------------

Schnittstellen


Loxone Air	868 MHz (SRD Band Europa), 4 Kanäle, max. 15,1 mW e.r.p. 915 MHz (ISM Band Region 2), 10 Kanäle, max. 13,2 mW interne Antenne
------------	---

Umgebungsbedingungen

Temperatur	0 ... 55 °C / 32 ... 131 °F
Luftfeuchtigkeit	max. 95 % r. F. (nicht kondensierend)

Anschlussplan

Anschlussplan

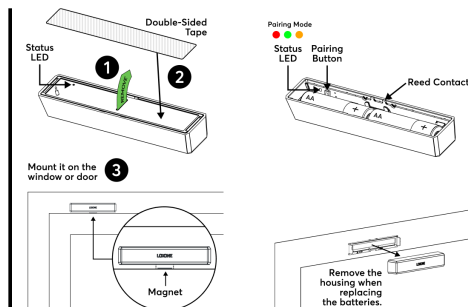

Produkteigenschaften


Farbe	Weiß: Art. Nr. 100666 Anthrazit: Art. Nr. 100667
-------	---

Glanzgrad	Matt
-----------	------

Gewicht & Abmessungen

Nettogewicht	70 g
Bruttogewicht	88 g
Produktmaße	116 x 22 x 17,5 mm / 4,57 x 0,87 x 0,69" (L x W x H)

Produktmaßzeichnung

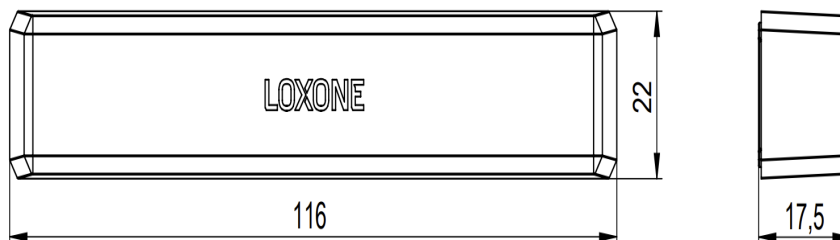

Packmaß	140 x 56 x 21 mm / 5,51 x 2,21 x 0,83" (L x W x H)
---------	--

Zertifizierungen & Standards

Schutzklasse	IP20
--------------	------

Zertifizierungen



Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von



Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom