
LOXONE

Datasheet

Tubular Motor SOLIDline Air 10Nm

Part No: 100182

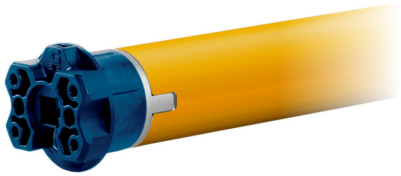

About the product

The tubular motor SOLIDline Air by Geiger drive technology with integrated **Loxone Air radio technology** - perfect for renovators and refurbishers!
Features:

- For all roller shutters and awnings - whether in new buildings or existing buildings
- No separate cables required for buttons and transmitters
- Thanks to mesh technology, structural barriers can also be easily overcome
- Energy efficient and quiet
- Automatic obstacle detection
- Anti-freeze protection
- Curtain relief

LOXONE

Technical Data

Power Supply	0.47A
Voltage	230V~/50Hz
Cos Phi (cosΦ)	>0.95
Inrush current (Factor)	x 1.2
Power	105W
Torque	10Nm
Speed	16 1/min
Ingress protection	IP44
Product dimensions	516.5x45mm
Operating mode	S2 4min
Weight	ca. 1.90kg
Operaiting temperature	-10 – 60°C / H max. 90°C
Humidity	-15 – 70°C / dry, non-condensing

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com


Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

LOXONE

Datenblatt

Rohrmotor SOLIDline Air 10Nm

Part No: 100182

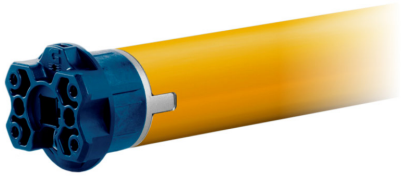

Über das Produkt

Der Rohrmotor SOLIDline Air by Geiger Antriebstechnik mit integrierter **Loxone Air Funktechnologie** – perfekt für Renovierer & Sanierer!

Features:

- Für alle Rolläden und Markisen – egal ob im Neubau oder bestehenden Gebäude
- Keine separaten Leitungen für Taster und Sender notwendig
- Dank Mesh-Technologie auch bauliche Barrieren einfach überwindbar
- Energieeffizient und Geräuscharm
- Automatische Hinderniserkennung
- Festfrierschutz
- Behangentlastung

LOXONE

Technische Daten

Spannungsversorgung	0,47A
Spannung	230V~/50Hz
Cos Phi (cosΦ)	>0,95
Einschaltstrom (Faktor)	x 1,2
Leistung	105W
Drehmoment	10Nm
Drehzahl	16 1/min
Schutzart	IP44
Produktmaße	516,5x45mm
Betriebsart	S2 4min
Gewicht	ca. 1,90kg
Betriebstemperatur	-10 – 60°C / H max. 90°C
Luftfeuchtigkeit	-15 … 70°C / trocken, nicht kondensierend

Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom