LOXONE

Datasheet

Touch Pure Flex Standard Audio Air Anthracite Gen. 1 - Discontinued Model

Part No: 100547



About the product

DISCONTINUED MODEL

This model has been discontinued and is no longer available for purchase.

For current alternatives, please visit shop.

The Touch Pure Flex Air is your 100% customizable control device with up to **12 freely definable and positionable touch points**. Menus, values, texts and statuses can be displayed using the integrated **LED matrix display** and **3 status LEDs***. In addition, the Touch Pure Flex also serves as a room climate sensor thanks to the **integrated temperature and humidity sensor**.

In this version, the Touch Pure Flex comes to you in a comprehensive **standard configuration**, which covers the most important functions:

- **Lighting:** Choose the right lighting mood quickly and easily.
- **Shading:** Control shading specifically and move it to the desired position.
- **Temperature:** Easily adjust the temperature.
- **Party mode:** Start individual party lighting and your favorite playlist - easily link all functions to get your building in the party mood.
- **Audio:** Regulate the volume, select your desired playlist and skip through individual songs.

Electrical Specifications

Supply voltage	9 ... 28 V DC or 2x AAA batteries
Power consumption	typ. 0.2 W, max. 1.7 W at display brightness 100 %
Power loss	max. 1.7 W
Battery Lifetime	up to 1 year
Touch area	capacitive touch detection 12/14 touch points
Temperature detection range	-40 ... 125°C / -40 ... 257°F; +/- 0.5°C / 0.9°F
Humidity detection range	0 ... 100% r.H. +/- 2%, (non condensing)
Temperature	-20 ... 40°C / -4 ... 104°F
Recommended mounting height	135cm / 53.15”

Interfaces

LOXONE Air	868MHz (SRD Band Europe), 4 channels available max. Power 15.1mW e.r.p. 915MHz (ISM Band Region 2), 10 channels available max. Power 13.2mW internal antenna

Operating Elements

Click feedback	Yes

Ambient Conditions


Humidity	max. 95% r.H. (non condensing)


Connection Terminals

Terminal type	DG220B
Wire cross-section	0.28 ... 0.8 mm² / AWG 23 ... 18
Stripping length	5 ... 6 mm / 0.2 ... 0.24”
Temperature resistance	-40 ... 105°C / -40 ... 221°F

Connection Diagram

Connection Diagram

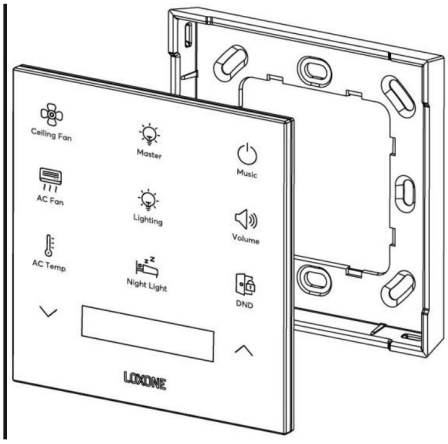



Product Characteristics

Colours	Black: RAL 9005
Finish	Matte

Weight & Dimensions

Net weight	102 g
Total weight	167 g
Product dimensions	90 x 90 x 16 mm / 3.55 x 3.55 x 0.63” (L x W x H)
Pack size	104 x 107 x 39 mm / 4.09 x 4.21 x 1.54” (L x W x H)

Certifications & Standards

Safety class	IP44
Certifications	CE UK CA

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom

Datenblatt

Touch Pure Flex Standard Audio Air Anthrazit Gen. 1 - Auslaufmodell

Part No: 100547



Über das Produkt

DISCONTINUED MODEL

This model has been discontinued and is no longer available for purchase.

For current alternatives, please visit shop.

Der Touch Pure Flex Air ist mit bis zu **12 frei definier- und positionierbaren Touchpunkten** dein 100% personalisierbares Bediengerät. Mit dem integrierten **LED Matrix Display,** sowie **3 Status LEDs*** können Menüs, Werte, Texte und Stati ausgegeben werden. Zudem dient der Touch Pure Flex dank **integriertem Temperatur- und Feuchtesensor** zugleich als Raumklimasensor.

In dieser Variante kommt der Touch Pure Flex in einer umfassenden **Standard-Konfiguration** zu dir, welche die wichtigsten Funktionen abdeckt:

- **Beleuchtung:** Wähle schnell und einfach die passende Lichtstimmung.
- **Beschattung:** Steuere gezielt Beschattungen an und fahre diese auf Wunschposition.
- **Temperatur:** Passe unkompliziert die Temperatur an.
- **Party-Modus:** Starte eine individuelle Party-Beleuchtung sowie deine Lieblingsplaylist - verknüpfe unkompliziert alle Funktionen, um dein Gebäude in Feierlaune zu bringen.
- **Audio:** Reguliere die Lautstärke, wählen deine Wunschplaylist und skippe durch einzelne Songs.

Elektrische Spezifikationen

Versorgungsspannung	9 ... 28VDC oder 2x AAA Batterien
Leistungsaufnahme	typ. 0,2 W, max. 1,7 W bei Display Helligkeit 100 %
Verlustleistung	max. 1.7 W
Batterie Lebensdauer	bis zu 1 Jahr
Tastbereich	kapazitive Berührungserkennung 12/14 Tastpunkte
Messbereich Temperatursensor	-40 ... 125°C / -40 ... 257°F; +/- 0.5°C / 0.9°F
Messbereich Luftfeuchtigkeitssensor	0 ... 100% r.H. +/- 2%, (nicht kondensierend)
Temperatur	-20 ... 40°C / -4 ... 104°F
Empfohlene Montagehöhe	135cm / 53,15”

Schnittstellen

LOXONE Air	868MHz (SRD Band Europa), 4 Kanäle wählbar max. Sendeleistung 15,1mW e.r.p. 915MHz (ISM Band Region 2), 10 Kanäle wählbar max. Sendeleistung 13,2mW interne Antenne

Bedienelemente

Klick Feedback	Ja

Umgebungsbedingungen


Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)


Anschlussklemmen

Klemmentyp	DG220B
Leiterquerschnitt	0,28 ... 0,8 mm² / AWG 23 ... 18
Abisolierlänge	5 ... 6 mm / 0,2 ... 0,24”
Temperaturbeständigkeit	-40 ... 105°C / -40 ... 221°F

Anschlussplan

Anschlussplan

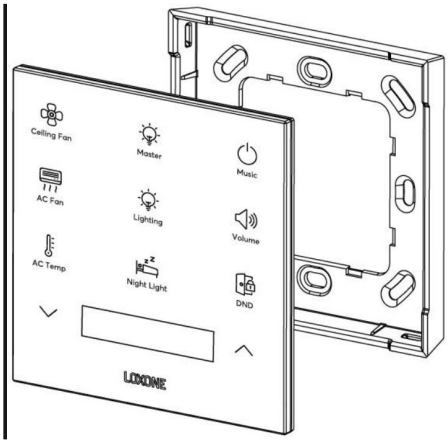



Produkteigenschaften

Farbe	Schwarz: RAL 9005
Glanzgrad	Matt

Gewicht & Abmessungen

Nettogewicht	102 g
Bruttogewicht	167 g
Produktmaße	90 x 90 x 16 mm / 3,55 x 3,55 x 0,63” (L x B x H)
Packmaß	104 x 107 x 39 mm / 4,09 x 4,21 x 1,54” (L x B x H)

Zertifizierungen & Standards

Schutzklasse	IP44
Zertifizierungen	CE UK CA

Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von

Loxone Electronics GmbH
Smart Home 1
4154 Kollerschlag
Austria
Tel: +43 7287 7070-0
loxone.com

Loxone UK Ltd.
The Forum
Station Road
Theale, RG7 4RA
United Kingdom