

Datasheet

Touch Pure Classic for Nano Anthracite

Part No: 100586



About the product

The Loxone Touch Pure for Nano is a **module** that can be plugged into the Loxone Nano IO Air or the Nano Dimmer Air. It has **five touch points** on a glass front for operating the most important functions in a room. When a button is touched, a click is heard as **acoustic confirmation**. An **orientation light** enables the device to be identified in the dark.

For the best user experience in your projects, we recommend: Switch to [the new Touch Pure](#) now. The revised design offers maximum user-friendliness and fits perfectly into modern interiors.

Electrical Specifications


Power Supply	via Nano IO Air / Nano Dimmer Air
Temperature	-20 ... 70°C / -4 ... 158°F
Touch points	5 touch points, capacitive touch detection
Click feedback	Yes
Recommended mounting height	135cm / 53.15"

Ambient Conditions

Humidity	max. 95% r.H. (non condensing)
----------	--------------------------------

Connection Diagram


Connection Diagram

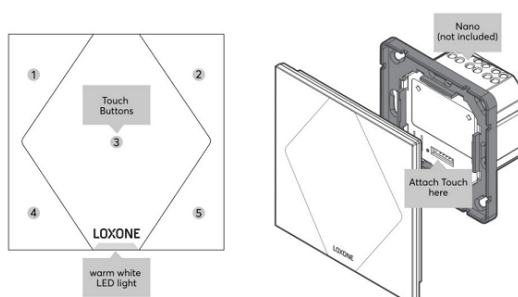

Product Characteristics

Colours	Anthracite: RAL 7016
Finish	Matte

Weight & Dimensions

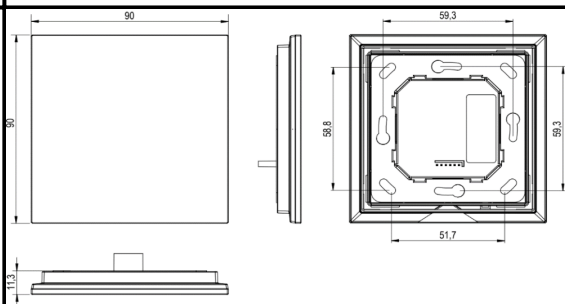Net weight	108 g
Total weight	127 g
Product dimensions	90x90x23mm / 3.54x3.54x0.9" (LxWxH)
Product dimensions drawing	 The drawing shows three views of the square switch plate. The front view is a square with dimensions 90mm x 90mm. The side view shows a thickness of 23mm. The top view shows the internal cutout with dimensions 59.3mm x 59.3mm and a central rectangular area with dimensions 51.7mm x 51.7mm. A small detail shows the mounting tabs with a width of 11.3mm.
Pack size	105x99.5x29mm / 4.13x3.92x1.14" (LxWxH)

Certifications & Standards

Safety class	IP40
Certifications	 The image shows two certification logos: the CE mark and the UKCA mark, both enclosed in rounded rectangular frames.

Installation must be carried out by a qualified electrician in accordance with the relevant regulations.

Published by

Loxone Electronics GmbH
 Smart Home 1
 4154 Kollerschlag
 Austria
 Tel: +43 7287 7070-0
 loxone.com

Loxone UK Ltd.
 The Forum
 Station Road
 Theale, RG7 4RA
 United Kingdom

Datenblatt

Touch Pure Classic for Nano Anthrazit

Part No: 100586



Über das Produkt

Der Loxone Touch Pure for Nano ist ein **Modul zum Aufstecken** auf die Loxone Nano IO Air oder den Nano Dimmer Air. Er verfügt über **fünf Tastpunkte** auf einer Glasfront, zur Bedienung der wichtigsten Funktionen eines Raumes. Bei Berührung einer Taste erfolgt ein Klicken als **akustische Bestätigung**. Ein **Orientierungslicht** ermöglicht das Erkennen des Gerätes im Dunkeln. Für die beste Benutzererfahrung in Ihren Projekten empfehlen wir: Setzen Sie ab sofort auf [den neuen Touch Pure for Nano](#). Das überarbeitete Design bietet maximale Nutzerfreundlichkeit und passt perfekt zu modernen Interieurs.

Elektrische Spezifikationen


Spannungsversorgung	via Nano IO Air / Nano Dimmer Air
Temperatur	-20 ... 70°C / -4 ... 158°F
Tastpunkte	5 Tastpunkte, kapazitive Berührungserkennung
Klick Feedback	Ja
Empfohlene Montagehöhe	135cm / 53,15"

Umgebungsbedingungen

Luftfeuchtigkeit	max. 95% r.H. (nicht kondensierend)
------------------	-------------------------------------

Anschlussplan


Anschlussplan

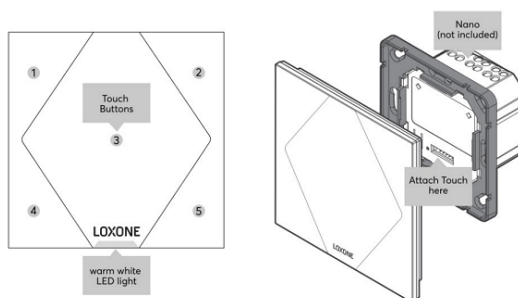

Produkteigenschaften

Farbe	Anthracite: RAL 7016
Glanzgrad	Matt

Gewicht & Abmessungen

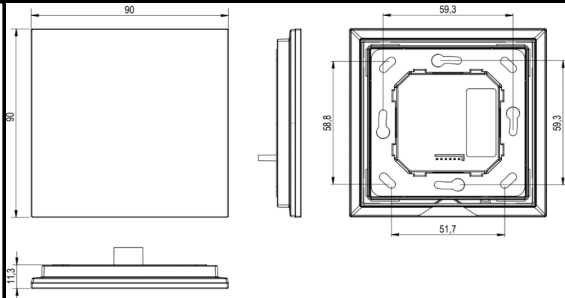Nettogewicht	108 g
Bruttogewicht	127 g
Produktmaße	90x90x23mm / 3,54x3,54x0,9" (LxBxH)
Produktmaßzeichnung	 The technical drawing shows three views of the square switch plate. The front view is a square with dimensions 90mm x 90mm. The side view shows a thickness of 23mm. The top view shows the internal mounting holes and a central rectangular cutout with dimensions 59.3mm x 59.3mm. A small detail shows the mounting tabs with a width of 11.3mm.
Packmaß	105x99,5x29mm / 4,13x3,92x1,14" (LxBxH)

Zertifizierungen & Standards

Schutzklasse	IP40
Zertifizierungen	 The image shows the CE (Conformité Européenne) and UKCA (United Kingdom Conformity Assessed) certification marks, indicating compliance with European and UK standards.

Die Installation muss von einer qualifizierten Elektrofachkraft gemäß den einschlägigen Vorschriften durchgeführt werden.

Veröffentlicht von

Loxone Electronics GmbH
 Smart Home 1
 4154 Kollerschlag
 Austria
 Tel: +43 7287 7070-0
 loxone.com

Loxone UK Ltd.
 The Forum
 Station Road
 Theale, RG7 4RA
 United Kingdom